



SUPER TIL

WIRE ROPE WINCH

SUPER TIL
LIFTING CAPACITY: 1500 KGS
PULLING CAPACITY: 2500 KGS
HONKO SEISAKUSHO CO., LTD.
HONKO SEISAKUSHO




ΑΦΟΙ Α. ΠΑΠΑΔΟΠΟΥΛΟΙ Α.Ε.
ΑΝΤΙΠΡΟΣΩΠΕΙΣ - ΕΙΣΑΓΩΓΕΣ
ΜΑΚΡΩΝ ΤΕΙΧΩΝ 27 - 185 40 ΠΕΙΡΑΙΑΣ
ΤΗΛ. (210) 411.1824, 411.6109, 413.0256
ΤΗΛ. (210) 4174915-6 FAX (210) 4122448
E-MAIL: simcon@hol.gr

HONKO SEISAKUJYO CO.,LTD.

SUPER TIL

WIRE ROPE WINCH

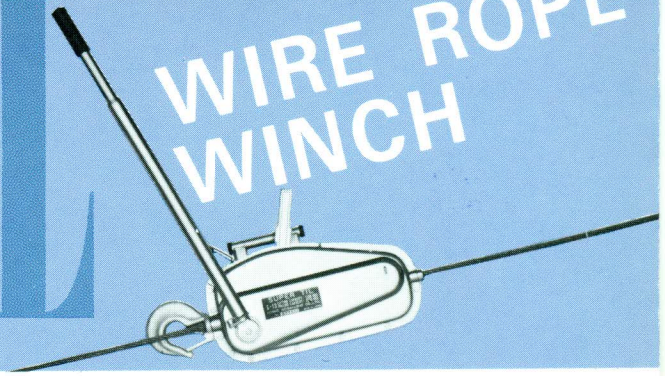

Mechanism :

SUPER TIL need not accompany a wire-drum for rolling up wire-rope, and is therefore small in size, light in weight. By moving the handle, left and right, wire-rope passes through.

SUPER TIL as if it were hauled hand over hand by means of two chucks equipped inside the body. This is very simply done and no experience is necessary.

Features :

1. Measures small and light.
2. Equipped with two safety devices, and this warrants safe operation.
3. Wire-rope is drawn out straight, regardless of its length, and this distant operation.
4. Wire-rope can be used at any working degrees.
5. Equipped with a safety hook, and this prevents wire rope from coming off while operation.
6. Most rationally planned, designed and durable.

Specification

Model No.	S-7	S-15	S-35
Lifting capacity :	800 kg	1,600 kg	3,200 kg
Pulling capacity :	1,250 kg	2,500 kg	5,000 kg
Test to :	1,500 kg	3,000 kg	6,000 kg
Length of handle	790 mm	1,050 mm	1,210 mm
Steel wire rope	IWRC 9mm dia.	IWRC 12mm dia.	IWRC 16mm dia.
Net weight ^(without wire rope)	8 kg	22 kg	31.5 kg
External dimension	50×25×10cm	62×30×15cm	72×32×14cm
Material casing	SS41 (JIS)	SS41 (JIS)	AL casting
Breaking strength of wire rope	5,430 kg	9,680kg	17,200 kg
safety device	safety pins	safety pins	safety pins

